# Spider 28

# 

### SPECIFICATIONS:

OR ELCIR ECIR ECITO.	
LOA	8.35 m
LWL	7.90 m
Beam	2.49m
Mast	10.67 m
Main (fully battened)	24 sq.m
Headsail	17.5 sq.m
Spinnaker	55 sq.m
Draft	max 2.2m
Trailable weight	1995 Kg
Total displacement	1320 Kg
Keel (dagger)	400 Kg



Tel/Fax: (02) 4626 8423

Mobile: 0428 963 070 or 0413 963 070

Email: rossmarine@ideal.net.au

## Standard Features

Four cockpit coaming bins.

Hydrodynamically profiled cast iron keel.

Separate toilet area or optional fully enclosed toilet.

Walk through/open transom with large boarding platform.

Two saloon backrests with generous shelving for odds and ends.

Two generous self-draining cockpit lockers. Large self draining anchor locker.

Multi-functional galley unit with moulded sink & waste, drainage/food preparation area, stove recess, large insulated icebox, compartments for cutlery and miscellaneous items plus large storage cupboard under sink.

Accommodation for at least 6 adults, Double V-berth with collision bulkhead. 2 single saloon berths with 4 large storage compartments under, 2 quarter berths or optional double/triple aft berth.

All hand laid in vinylester/polyester resin, biaxial glass, balsa and klegecell to class minimum weight of 770Kg (plus keel).

Each boat will be provided with complete photographic details and instructions to assist in home completion.

### Stage 1 - Lock up Stage Stage 2 - Sail-Away Kit Moulded / Fitted / Bonded As in Stage 1 but including: Hull and Deck, including centreboard case, Supplied and Fitted hatches, poptop mouldings, shelves, Jib tack fitting, including bow roller chainplates, furniture. Articulating alloy motor bracket to transom. Full hood-liner. Cabin step. Integral mounting pads for Ronstan deck Ronstan deck fittings, including Harken winches, Excel fittings racing sheets and braces. All bulkheads and gussets. Supplied, not fitted Centreboard (approx. 400Kg) Pulpit, 2 pushpits, 6 stanchions, twin safety fence wires Aluminium toe-rails. Mast, boom, spinnaker pole standing and running rigging Windows Mainsail (Dacron), loose foot, 1st and 2nd reef, luff slides. Large companionway sliding hatch with Headsail, (Dacron) wire luff (hanks optional) storm boards Spinnaker 3/4 oz. Tri-radial Supplied, not fitted Fixings (bolts, washers, Nyloc nuts, pop rivets, Duralac, Bunk locker lids. silicone) Rudder Wiring conduit (under cockpit floor) Trailer - dual axle fitted with manual over-ride disc brakes and submersa lights

Option - enormous rear double/triple berth with full sitting headroom on both port and starboard sides

Exclusive NSW, QLD and ACT Agents Ross Marine

S.28 Spec 8/2000-1

98 Emerald Drive, Eagle Vale NSW 2558


Sourced, stored & provided, courtesy of John Crawford Marine. "QLD's Used Boat Specialists Since 1964"

# SPIDER 28

Interior Layout 2

Deck Layout



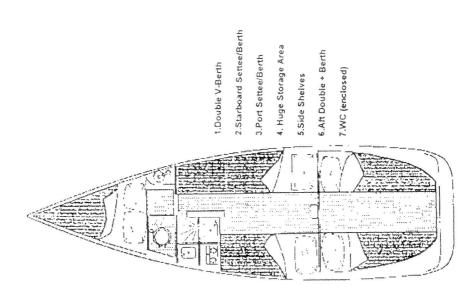

2.Starboard Settee/Berth 2550 x 700/440

1.Double V-Berth 2100 x 1380 (Extends to 2500 x 1500) 6. Aft Double - Berth 2100 x 2050/1500

7. WC 500 x 800

3. Port Settee/Berth 1700 x 700/600 4. Floor area 1700 x 750 + 850 x 350

5. Main Cabin Headroom 1680

2 Halyard Clutches

Genoa Track

Halyard Winch Pole downhaul

50

Spinnaker halyard ---

Sheet Winch

Vang

Pole downhaul

Keel Winch

(Main + Jib)

- Cunningham

2 to 1 downhaul

system

Fibreglass Forward hatch.

With inbuilt skylight

Anchor Locker

Large Poptop

250mm Wide board Platform to Open Cockpit/Transom

Moulded Fibreglass rudder

3 to 1 Traveller

Vang

Traveller Car

Huge Lined / Cockpit Lockers

Traveller track

Interior Layout 1